


Intermodule® Handrails

The **Intermodule® handrail system** is made of isophthalic polyester (**ISO-FR**) profiles. The colour is safety-yellow or grey. The handrail consists of four different profiles: square tube (50x50x5mm) as post (post distance max = 1250 mm), an ergonomically designed top rail (70x63mm), a round tube knee rail (Ø26x5mm), and an ergonomically designed kick plate (150x15x4mm). All connections are assembled with blind rivets. The Interstruct® handrail system has been tested accordingly and exceeds the requirements of the European Standard: EN ISO 14122-3.

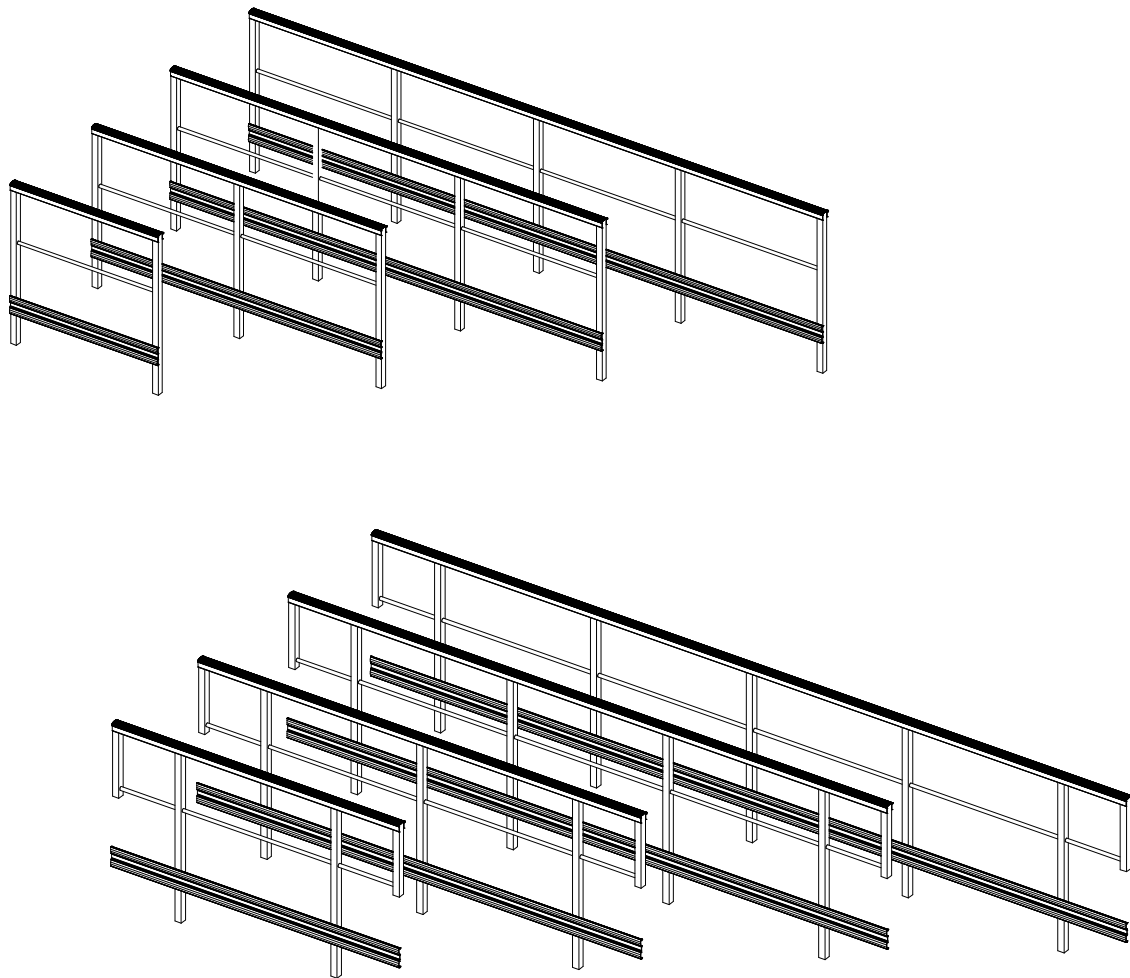


Modules

8 standard modules are available:

4 with straight ends:


- ❖ IM-H-125
- ❖ IM-H-250
- ❖ IM-H-375
- ❖ IM-H-500

IM = InterModule®
H = Handrail
125 = length (1,25 m)




4 with "extended" ends:

- ❖ IM-H-225E
- ❖ IM-H-350E
- ❖ IM-H-475E
- ❖ IM-H-600E

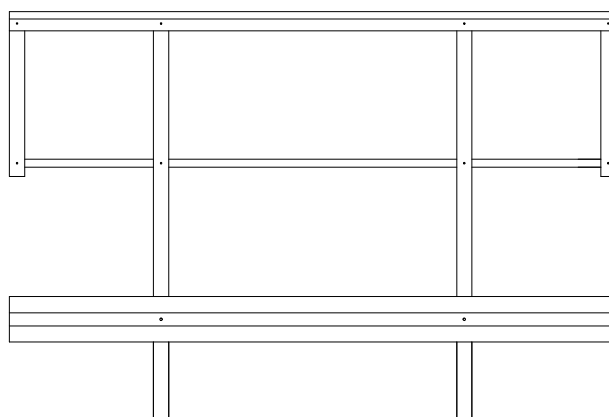

Optionally the modules with extended ends are available with loose endpost. In this way the length of the module can be adjusted on site.

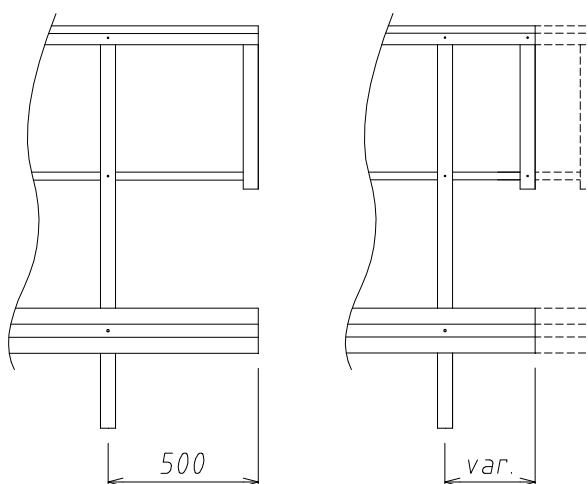


Mounting


Standardized mounting:

1. Side anchoring
2. Anchoring on concrete level by stanchion base

1

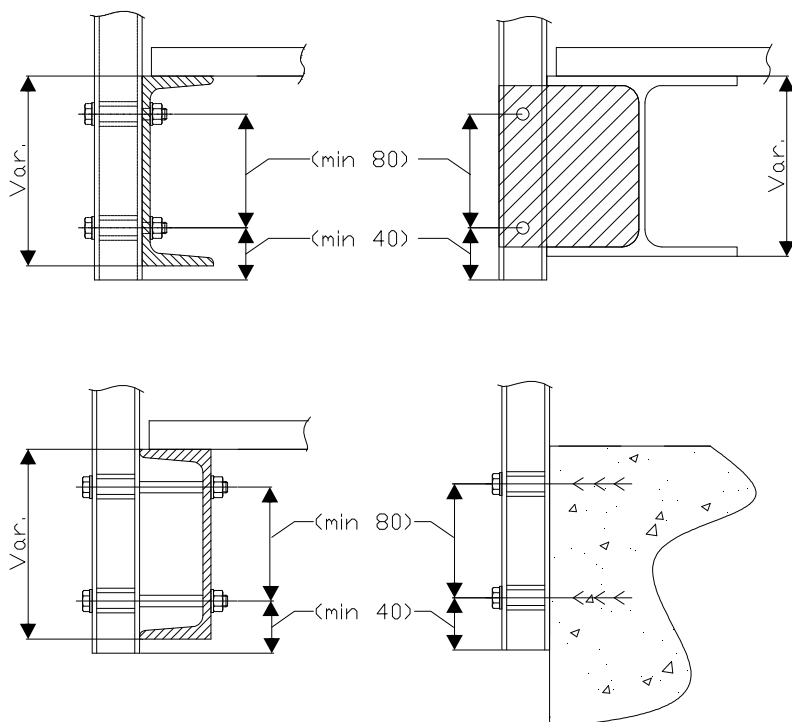

2

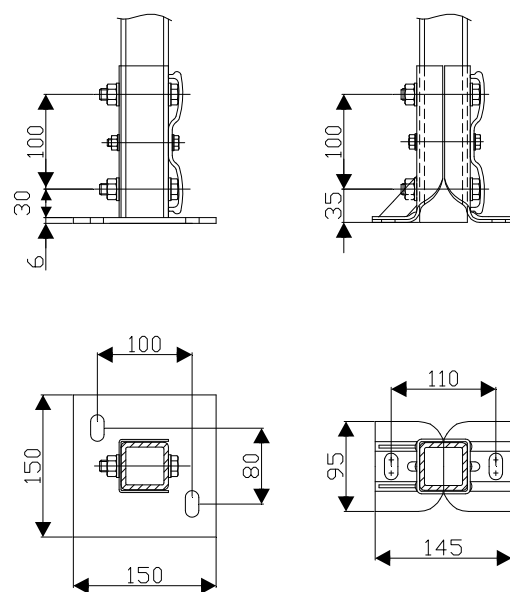

Interconnections

- A** – Two modules, 90 deg. angle connection
- B** – Two modules, straight connection

